


# C Band Motorized Tx Rx Feed for Skyware Global Antenna

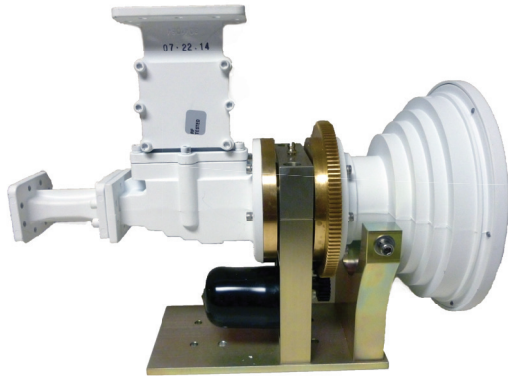

**FEED-VS-SWCMOTO**

- Motorized Transmit Receive Offset Feed
- Mounts to Skyware Global 1.8/2.4M Class III C band Tx Rx Antenna
- 24 Volt Motor and Potentiometer for Fine Polarization Adjustment

Specifications	
Polarity	Dual
Polarization	Linear
Frequency Range	Tx 5.850 - 6.725 Ghz Rx 3.4 - 4.2 Ghz
f/D Range	0.6
VSWR	Tx 1.3:1 Rx 1.4:1
Isolation	Tx 60 dB Rx 60 dB
Rotation	250°
Flanges	Tx CPR-137F Rx CPR - 229F

## Features

- 100% Tested
- Full 250° of Travel
- All Components Weather Resistant
- Field Replaceable Components
- Hard Coat Anodized Aluminum Gears for Wear Protection
- Ideal for Use with Research Concepts Controllers
- Hi Torque 24 VDC Motor/5K 5 Turn Potentiometer
- For Use with New Antennas or Upgrading Existing Antennas in the Field

FEED-VS-SWCMOTO\_REV003  
Specifications are subject to change without notice

sales@vikingsatcom.com vikingsatcom.com T: 517-629-3000 F: 517-629-2379

704 North Clark Street Albion, Michigan 49224